


# PANDJIRIS

## Turning Rolls

**Pandjiris manufactures a complete line of constant centerline turning rolls.**

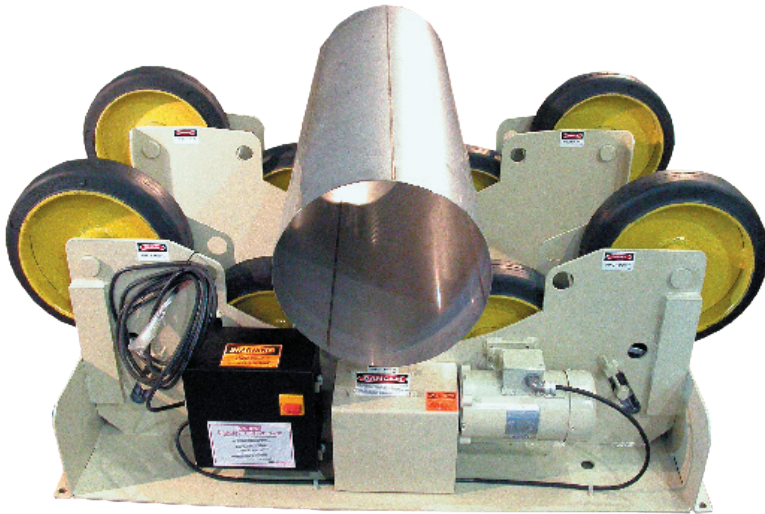

### **Tanker 150/75**

The Tanker 150/75 Turning Rolls.

Drive and Idler.

15,000 lb Weight Capacity.

3-1/2" to 12' Diameter Capacity.

Variable Speed from 3.7 to 74 IPM.

16" Diameter x 4" Wide Rubber Wheels.

Pendant Control.

115 Volt.

Additional Idlers Available.

### **Missouri Mules 30/15**

The Missouri Mule (MM) 30/15 Turning Rolls. Drive and Idler.

60,000 lb Weight Capacity.

12" to 16' Diameter Capacity.

Variable Speed from 5.3 to 53 IPM.

20" Diameter x 10" Wide Rubber  
Wheels.

Pendant Control.

460 Volt.

Additional Idlers Available.



P  
A  
N  
D  
J  
I  
R  
I  
S



4790 River Road Cincinnati, OH 45233

Toll Free: 800-288-9414

Phone: 513-941-4411 Fax: 513-467-3585

[www.weldplus.com](http://www.weldplus.com)

**Features:  
All Models**


Hand pendant with forward/stop/ reverse, speed potentiometer, and fast button is standard.  
 Universal plug allows for easy installation and changeout of footswitches, hand pendants, and tachometers.  
 Variable speed controls.  
 Heavy-duty construction for longer service life.  
 High quality worm gear reducers for smooth operation.  
 Solid state controls with dynamic braking on the rotation drives.

**MISSOURI MULES Series:**


Constant centerline.  
 Superior worm gears.  
 Quick, accurate roll center changes.  
 Positively driven drive roll connection.

**Available Options:**

Forward/stop/reverse footswitch  
 Fast/slow footswitch  
 Preset digital tachometer  
 Steel wheels  
 Overload discs  
 Thrust rolls  
 Anti-skewing system  
 Spring loaded casters

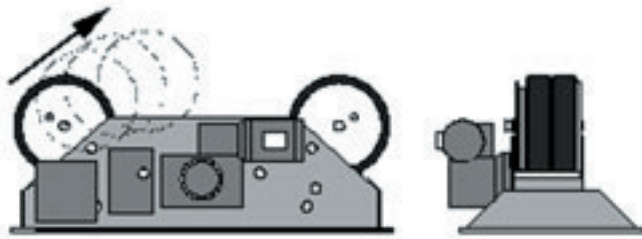

**MM Rolls**

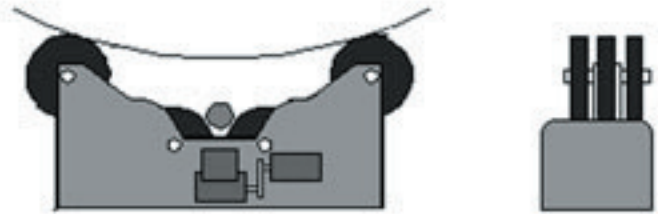

**Tanker Series**

Model Turning	Capacity (Power Roll)	Load Capacity (Each Unit)	Diameter Range	Wheel Diameter	Combined Wheel Face	Speed Range	Length	Width	Overall Height
Tanker 80/40	8,000 lbs.	4,000 lbs.	4 to 144"	12"	10-7/8"	5.0 to 105 ipm	58-7/8"	17"	26-11/16"
Tanker 150/75	15,000 lbs.	7,500 lbs.	3.5" to 144"	16"	4"	4.4 to 88 ipm	64"	20"	26"
MM-15/5-T	30,000 lbs.	10,000 lbs	4" to 144"	16"	4"	2.1 to 63.5 ipm	61.25"	29.25"	32.11"
MM-30/15-T	60,000 lbs.	30,000 lbs	12" to 16'	20"	10"	1.7 to 50.2 ipm	94"	40.25"	42.16"
MM-60/30-T	120,000 lbs.	60,000 lbs	12" to 16'	20"	15"	2.0 to 61.4 ipm	94"	42"	42.16"
MW 90/45-T	180,000 lbs.	90,000 lbs	12" to 16'	20"	32"	2.0 to 61.4 ipm	94"	47"	42.16"