



FEATURES:

- Power mast:
Constant speed
60" vertical travel
92" clearance under boom
- Power boom with:
78" of reach
200 lb. load capacity
Variable speed
Auto and manual settings
- Anti-fall device
- Manual travel car with:
V-wheels
Brake
- Locking swivel base with:
Mounting bracket for power source
- Hand control pendant
- 440V 3 phase



PROFAX NO: WM-SA
Optional for mounting sub-arc package.

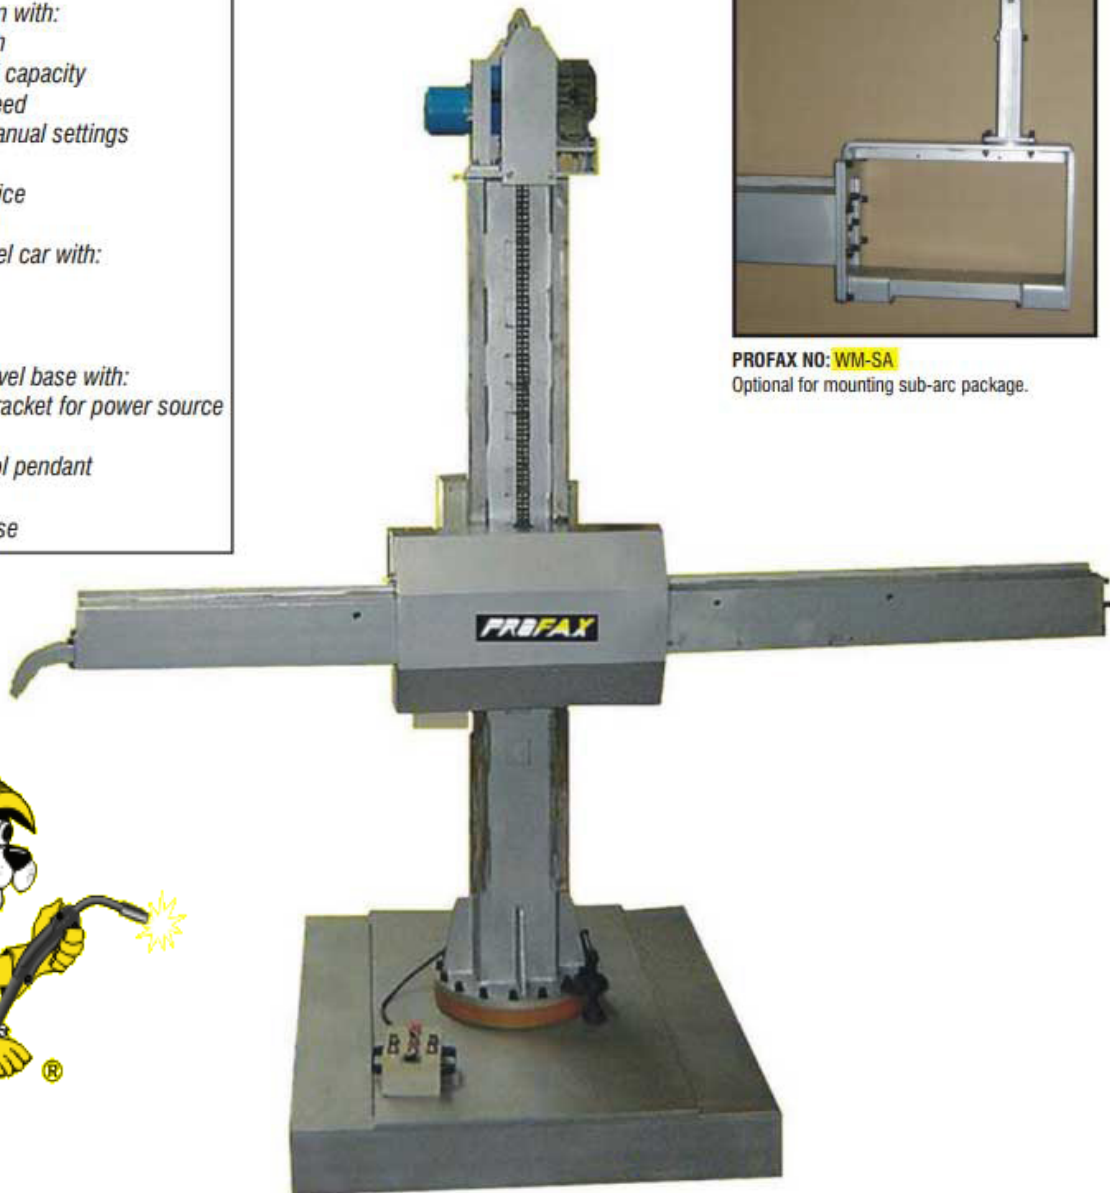

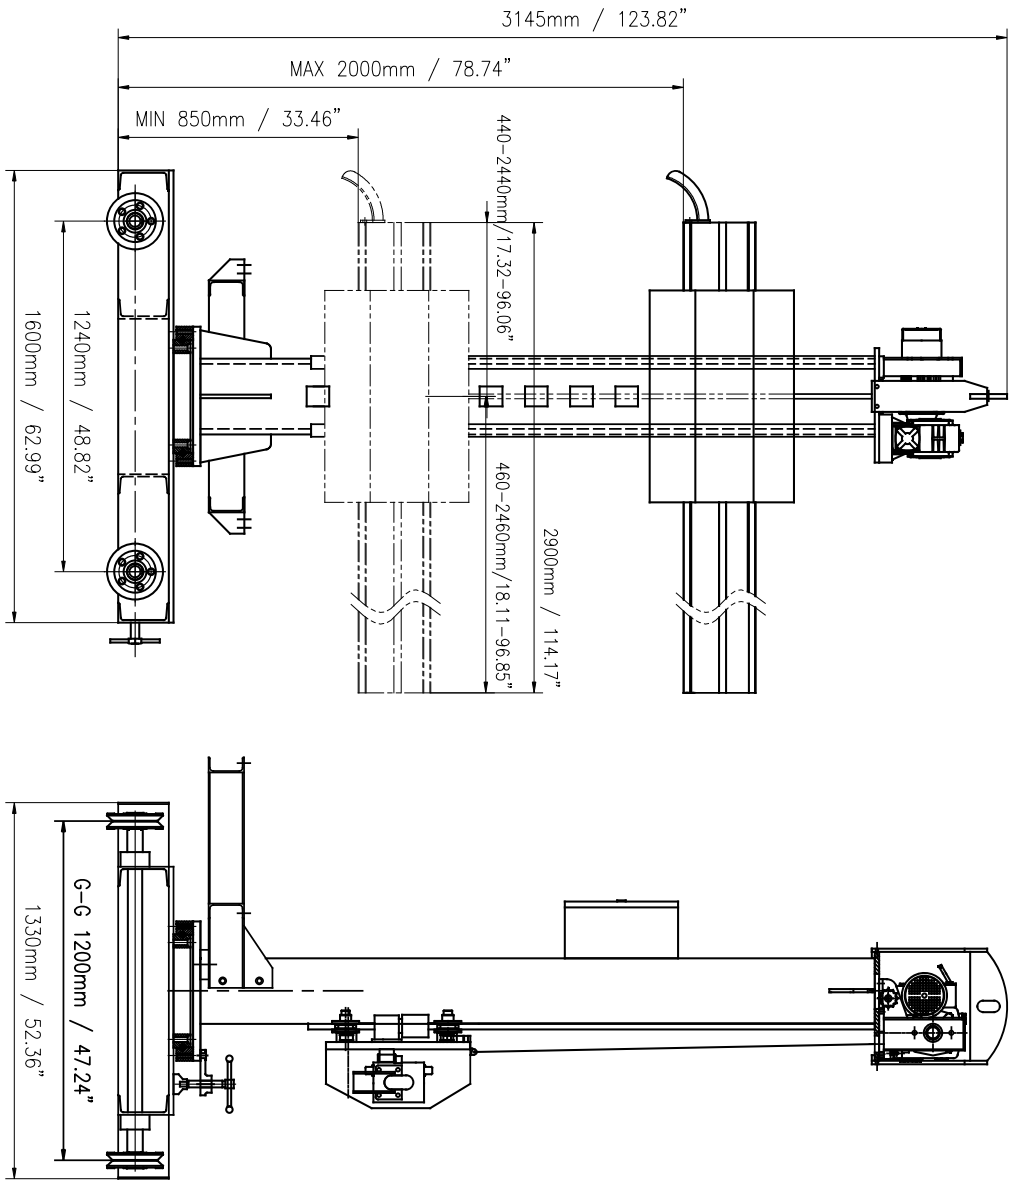

Specification for Manipulator

1	Model	WM-66-4
2	Boom Capacity	100Kg/220lbs at 300mm/11.81" from Boom End
3	Vertical Speed	Max 925mm/36.42"/min 0.37Kw at 60Hz with Brake
4	Vertical Drive Motor	0.37KW with Brake
5	Boom Speed	290mm/11.42" to 2940mm/115.75"/min 0-90VDC
6	Boom Drive Motor	100W DC Motor
7	Trawl Speed	N.A.
8	Max. Under Boom Height	2000mm / 78.74"
9	Effective Boom Trawl	2000mm / 78.74"
10	Travelcar G-G	1200mm / 47.24"
11	Boom Drive Control	DC Speed Controller
12	Electrical Panel	Yes
13	Base Type	Manual Travelcar
14	Column Rotation	Manual
15	Power Supply	440V-3P-60Hz
16	Control Voltage	24VAC
17	Control Means	Via push button Pendant on 6m / 20' cable
18	Color	Silver Grey
19	Qty	1 Unit
20	Weight	1270Kg / 2800lbs

Note:
1) CE Compliance



PROMAX		PRODUCT/MODEL :	WM-66-4
CLIENT :			
DRAWN	NAME	DATE	
APPROVED			
DWG. NO. :	WM-66-4	DWG. NAME :	MANIPULATOR 6x6
SHEET NO.	1 OF 1	SCALE :	1 : 1
		REVISION :	