


PANDJIRIS

Turning Rolls

Pandjiris manufactures a complete line of constant centerline turning rolls.

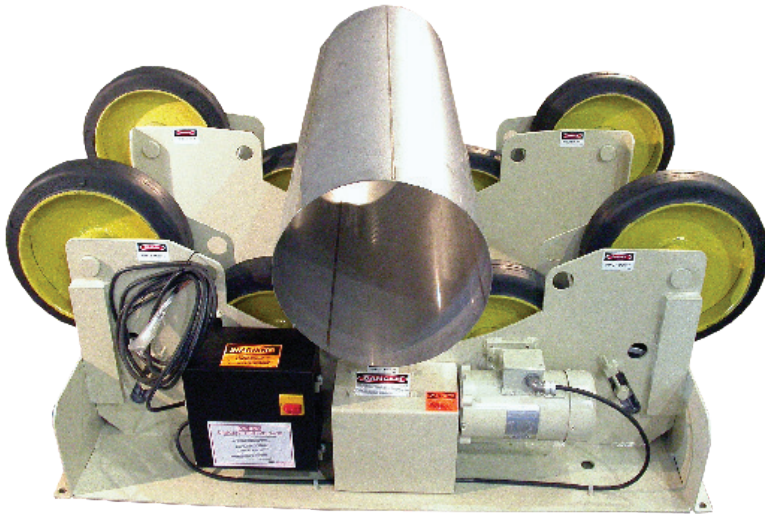

Tanker 150/75

The Tanker 150/75 Turning Rolls.

Drive and Idler.

15,000 lb Weight Capacity.

3-1/2" to 12' Diameter Capacity.

Variable Speed from 4.4 to 88 IPM.

16" Diameter x 4" Wide Rubber Wheels.

Pendant Control.

115 Volt.

Additional Idlers Available.

Missouri Mules 30/15

The Missouri Mule (MM) 30/15 Turning Rolls. Drive and Idler.

60,000 lb Weight Capacity.

12" to 16' Diameter Capacity.

Variable Speed from 5.3 to 53 IPM.

20" Diameter x 10" Wide Rubber
Wheels.

Pendant Control.

460 Volt.

Additional Idlers Available.



P
A
N
D
J
I
R
I
S



4790 River Road Cincinnati, OH 45233

Toll Free: 800-288-9414

Phone: 513-941-4411 Fax: 513-467-3585

www.weldplus.com

**Features:
All Models**


Hand pendant with forward/stop/ reverse, speed potentiometer, and fast button is standard.
 Universal plug allows for easy installation and changeout of footswitches, hand pendants, and tachometers.
 Variable speed controls.
 Heavy-duty construction for longer service life.
 High quality worm gear reducers for smooth operation.
 Solid state controls with dynamic braking on the rotation drives.

MISSOURI MULES Series:


Constant centerline.
 Superior worm gears.
 Quick, accurate roll center changes.
 Positively driven drive roll connection.

Available Options:

Forward/stop/reverse footswitch
 Fast/slow footswitch
 Preset digital tachometer
 Steel wheels
 Overload discs
 Thrust rolls
 Anti-skewing system
 Spring loaded casters

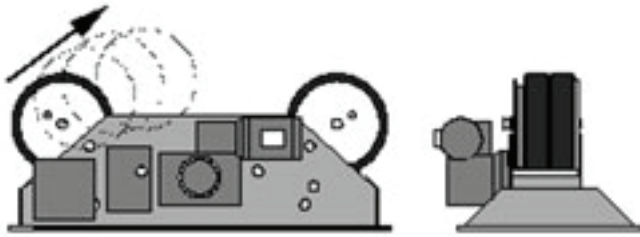

MM Rolls

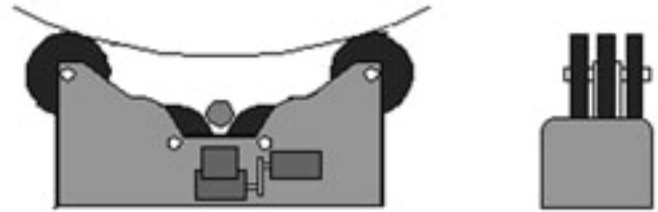

Tanker Series

Model Turning	Capacity (Power Roll)	Load Capacity (Each Unit)	Diameter Range	Wheel Diameter	Combined Wheel Face	Speed Range	Length	Width	Overall Height
Tanker 80/40	8,000 lbs.	4,000 lbs.	4 to 144"	12"	10-7/8"	5.0 to 105 IPM	58-7/8"	17"	26-11/16"
Tanker 150/75	15,000 lbs.	7,500 lbs.	3.5" to 144"	16"	4"	4.4 to 88 IPM	64"	20"	26"
MM-15/5-T	30,000 lbs.	10,000 lbs	4" to 144"	16"	4"	2.1 to 63.5 IPM	61.25"	29.25"	32.11"
MM-30/15-T	60,000 lbs.	30,000 lbs	12" to 16'	20"	10"	1.7 to 50.2 IPM	94"	40.25"	42.16"
MM-60/30-T	120,000 lbs.	60,000 lbs	12" to 16'	20"	15"	2.0 to 61.4 IPM	94"	42"	42.16"
MW 90/45-T	180,000 lbs.	90,000 lbs	12" to 16'	20"	32"	2.0 to 61.4 IPM	94"	47"	42.16"